
ULTRA-HIGH & HIGH PERFORMANCE



Sometimes speed and safety travel the same road.
In our top range, high performance is guaranteed without sacrificing the full pleasure of a safe journey.

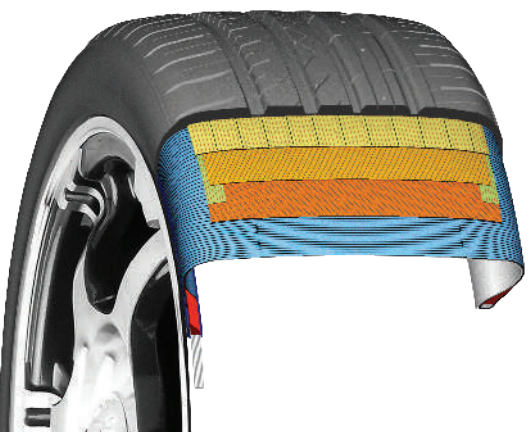

Nylon Chafer

To protect bead area while mounting/ dismounting and other external damage.

Bead Wire

To mantain the contact between tire and the wheel rim.

Double Layers & Wide Steel Belts

Provide tire reinforcement and helps stabilize the tread. Also serves to protect the tire from impact and puncture.

Nylon Cap Ply

To protect steel belt and improve tire performance.

High Turn Up Polyester

To improve sidewall against punctureand better lateral stiffness.

Belt Edge Gum

To prevent separation between belts edge and increase durability.

Inner liner

Low air permeability compound for better air retention.

High Apex with High & Hardness Bead Filler

A triangular extruded profile that placed to the top of the bead wire will improve tire performance especially at high speed.



Velocità DTX

DIRECTIONAL

IR-153

RACING | CITY | HIGH SPEED | RAIN & WET | HANDLING

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
195/50R15	82W	6,0	582	198	6,2	475	1047	2,5	36
215/45ZR17 *	87W	7,0	626	213	6,4	545	1201	3,5	51
235/45ZR17 *	94W	8,0	644	236	6,4	670	1477	3,5	51
245/40ZR17 *	91W	8,5	629	248	6,4	615	1356	3,5	51
245/40ZR18	97W XL	8,5	661	244	6,4	730	1609	3,4	50
255/35ZR18	94W XL	9,0	641	254	6,4	670	1477	3,4	50
265/35ZR18	97W XL	9,5	651	266	6,4	730	1609	3,4	50
285/35R18	101W XL	10,0	657	290	6,4	825	1819	3,4	50

* Coming Soon



City Surfer

ASYMMETRICAL

IA-181

CITY | WEAR LIFE | RAIN & WET | COMFORT | LOW NOISE | SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
225/65R17	102H	6,5	723	228	8,0	850	1875	2,5	36

Velostrada



ASYMMETRICAL

IA-185

CITY | HIGH SPEED | WEAR LIFE | RAIN & WET | HANDLING | LOW NOISE | SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/55R16	83V	6,0	613	191	7,3	487	1074	2,5	36
215/45ZR17	91W XL	7,0	629	212	8,0	615	1356	2,9	42
225/65R17	102H	6,5	724	228	8,0	850	1875	2,5	36
225/60R17	99V	6,5	702	224	8,0	775	1709	2,5	36
225/50R17	94V	7,0	661	227	8,0	670	1477	2,5	36
225/45ZR17	94W XL	7,5	634	223	8,0	670	1477	2,9	42
225/45ZR18	95W XL	7,5	660	228	8,0	690	1521	3,0	44
225/40ZR18	92W XL	8,0	636	224	8,0	630	1389	2,9	42
235/55R18	100V	7,5	715	241	8,0	800	1764	2,5	36
245/45ZR18	100W XL	8,0	680	240	8,0	800	1765	2,9	42
245/40ZR19	98W XL	8,5	680	245	8,0	750	1655	2,9	42
245/45ZR20	103W XL	8,0	730	240	8,0	875	1929	2,9	42
245/35ZR20	95W XL	8,5	681	245	8,0	690	1520	2,9	42

Evoraze



ASYMMETRICAL

IA-183

CITY | HIGH SPEED | WEAR LIFE | RAIN & WET | HANDLING | LOW NOISE | SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
195/55R15	85W	6,0	597	196	7,3	515	1135	2,5	36
195/50R15	82W	6,0	580	194	7,3	475	1047	2,5	36
205/50R15	86W	6,5	593	207	7,3	530	1168	2,5	36
195/50R16	84W	6,0	606	194	7,0	500	1102	2,5	36
205/45ZR17	88W XL	7,0	618	202	7,8	560	1235	2,9	42
215/45ZR17	91W XL	7,0	626	212	7,8	615	1356	2,9	42
225/45ZR18	95W XL	7,5	660	225	7,8	690	1521	2,9	42

Velocità GN2



ASYMMETRICAL

IA-182

HIGH SPEED | RAIN & WET | WEAR LIFE | HANDLING | LOW NOISE | SAVE FUEL

"Safety and stability is of utmost importance in the Velocita GN2's development. This is delivered by its **asymmetrical tread pattern** with **T-shape sipes** and a centre groove that help **accelerate water dissipation**, thus reducing the risks of aquaplaning substantially. Wet performance is especially important in Malaysia where torrential rain is common, and given the Velocita GN2's qualities, **it's an ideal fit for passenger cars.**
These traction-aig technologies are backed by the use of advanced rubber compounds which ensure that cornering performance and overall ride comfort are maintained even in dry conditions. The Velocita GN2 is a **versatile tyre for all seasons** which guarantees peace of mind with the brand's **ISO 9001 certification.**
Consumer tests using Velocita GN2 tyres in 215/55 R17 size proved that they not only match but also **exceed benchmarks set by the industry's more well-known names.** This was deduced after hard driving on Velocita GN2 tyres, a testament to their **dynamic abilities** as well as their **long-term quality.**
The Velocita GN2 is also available in 15 to 20-inch-wheel sizes. And with the performance, safety, reliability and value for money it offers, it's a choice you **won't regret**."

Technical Review

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/60R15	84H	5,5	603	182	7,2	500	1100	2,5	36
185/55R15	82V	6,0	588	191	7,2	475	1047	2,5	36
205/55R15	88V	6,5	612	214	8,0	560	1235	2,5	36
195/55R16	87V	6,0	622	196	7,3	545	1202	2,5	36
195/50R16	84V	6,0	606	198	7,0	500	1102	2,5	36
205/60R16	92V	6,0	652	209	8,0	630	1389	2,5	36
205/55R16	91V	6,5	633	213	8,0	615	1356	2,5	36
205/50R16	87V	6,5	614	212	8,0	545	1200	2,5	36
215/60R16	95V	6,5	664	219	8,0	690	1521	2,5	36
225/60R16	98V	6,5	676	225	8,0	750	1653	2,5	36
225/50R16	92V	7,0	633	230	8,0	630	1389	2,5	36
235/60R16	100V	7,0	691	240	8,0	800	1764	2,5	36
205/45ZR17	88W XL	7,0	615	206	8,0	560	1235	2,9	42
215/55R17	94V	7,0	668	229	8,0	670	1475	2,5	36
215/50R17	91V	7,0	648	228	8,0	615	1355	2,5	36
215/45ZR17	91W XL	7,0	629	212	8,0	615	1355	2,9	42
225/65R17	102 H	6,5	725	230	8,0	850	1875	2,5	36
225/60R17	99V	6,5	702	228	8,0	775	1710	2,5	36
225/55R17	97V	7,0	680	233	8,0	730	1610	2,5	36
225/50R17	94V	7,0	659	233	8,0	670	1475	2,5	36
225/45ZR17	94W XL	7,5	638	223	8,0	670	1475	3,0	44
235/55R17	99V	7,5	690	240	8,0	775	1709	2,5	36
235/45ZR17	97W XL	8,0	646	237	8,0	730	1610	3,0	44
245/45R17	99W XL	8,0	655	245	8,0	775	1710	2,9	42
225/55R18	98V	7,0	710	231	8,0	750	1653	2,5	36
225/50ZR18	95W	7,0	688	228	7,2	690	1521	2,5	36
225/45ZR18	95W XL	7,5	660	228	8,0	690	1520	3,0	44
225/40ZR18	92W XL	8,0	636	226	8,0	630	1390	2,9	42
235/50R18	97V	7,5	690	240	8,0	730	1609	2,5	36
235/45ZR18	98W XL	8,0	669	236	8,0	750	1653	2,9	42
235/40ZR18	95W XL	8,5	645	243	8,0	690	1520	3,0	44
245/50R18	100V	7,5	704	252	8,0	800	1765	2,5	36
245/45ZR18	100W XL	8,0	676	244	8,0	800	1765	3,0	44
245/40ZR18	97W XL	8,5	653	249	8,0	730	1610	3,0	44
275/45ZR18	103W	9,0	705	277	8,0	875	1929	2,5	36
235/35ZR19	91W XL	8,5	650	233	8,0	615	1356	2,9	42
245/45ZR19	102W XL	8,0	707	243	8,0	850	1875	2,9	42
245/40ZR19	98W XL	8,5	680	245	8,0	750	1655	2,9	42
245/35ZR19	93W XL	8,5	657	247	8,0	650	1433	2,9	42
275/40ZR19	105W XL	9,5	705	275	8,0	925	2040	2,9	42
245/45ZR20	103 W XL	8,0	730	240	8,0	875	1929	2,9	42
245/40ZR20	99W XL	8,5	711	239	8,0	775	1710	2,9	42
245/35ZR20	95W XL	8,5	681	245	8,0	690	1520	2,9	42
275/35ZR20	102W XL	9,5	706	276	8,0	850	1874	2,9	42