
ALL TERRAIN



Adjust seat and mirrors, fasten your seat belt and free your engines roar.
This range has been developed to let you enjoy the pleasure of a comfortable ride while the tires are focused on ensuring long lasting safety.

Terra Frontier

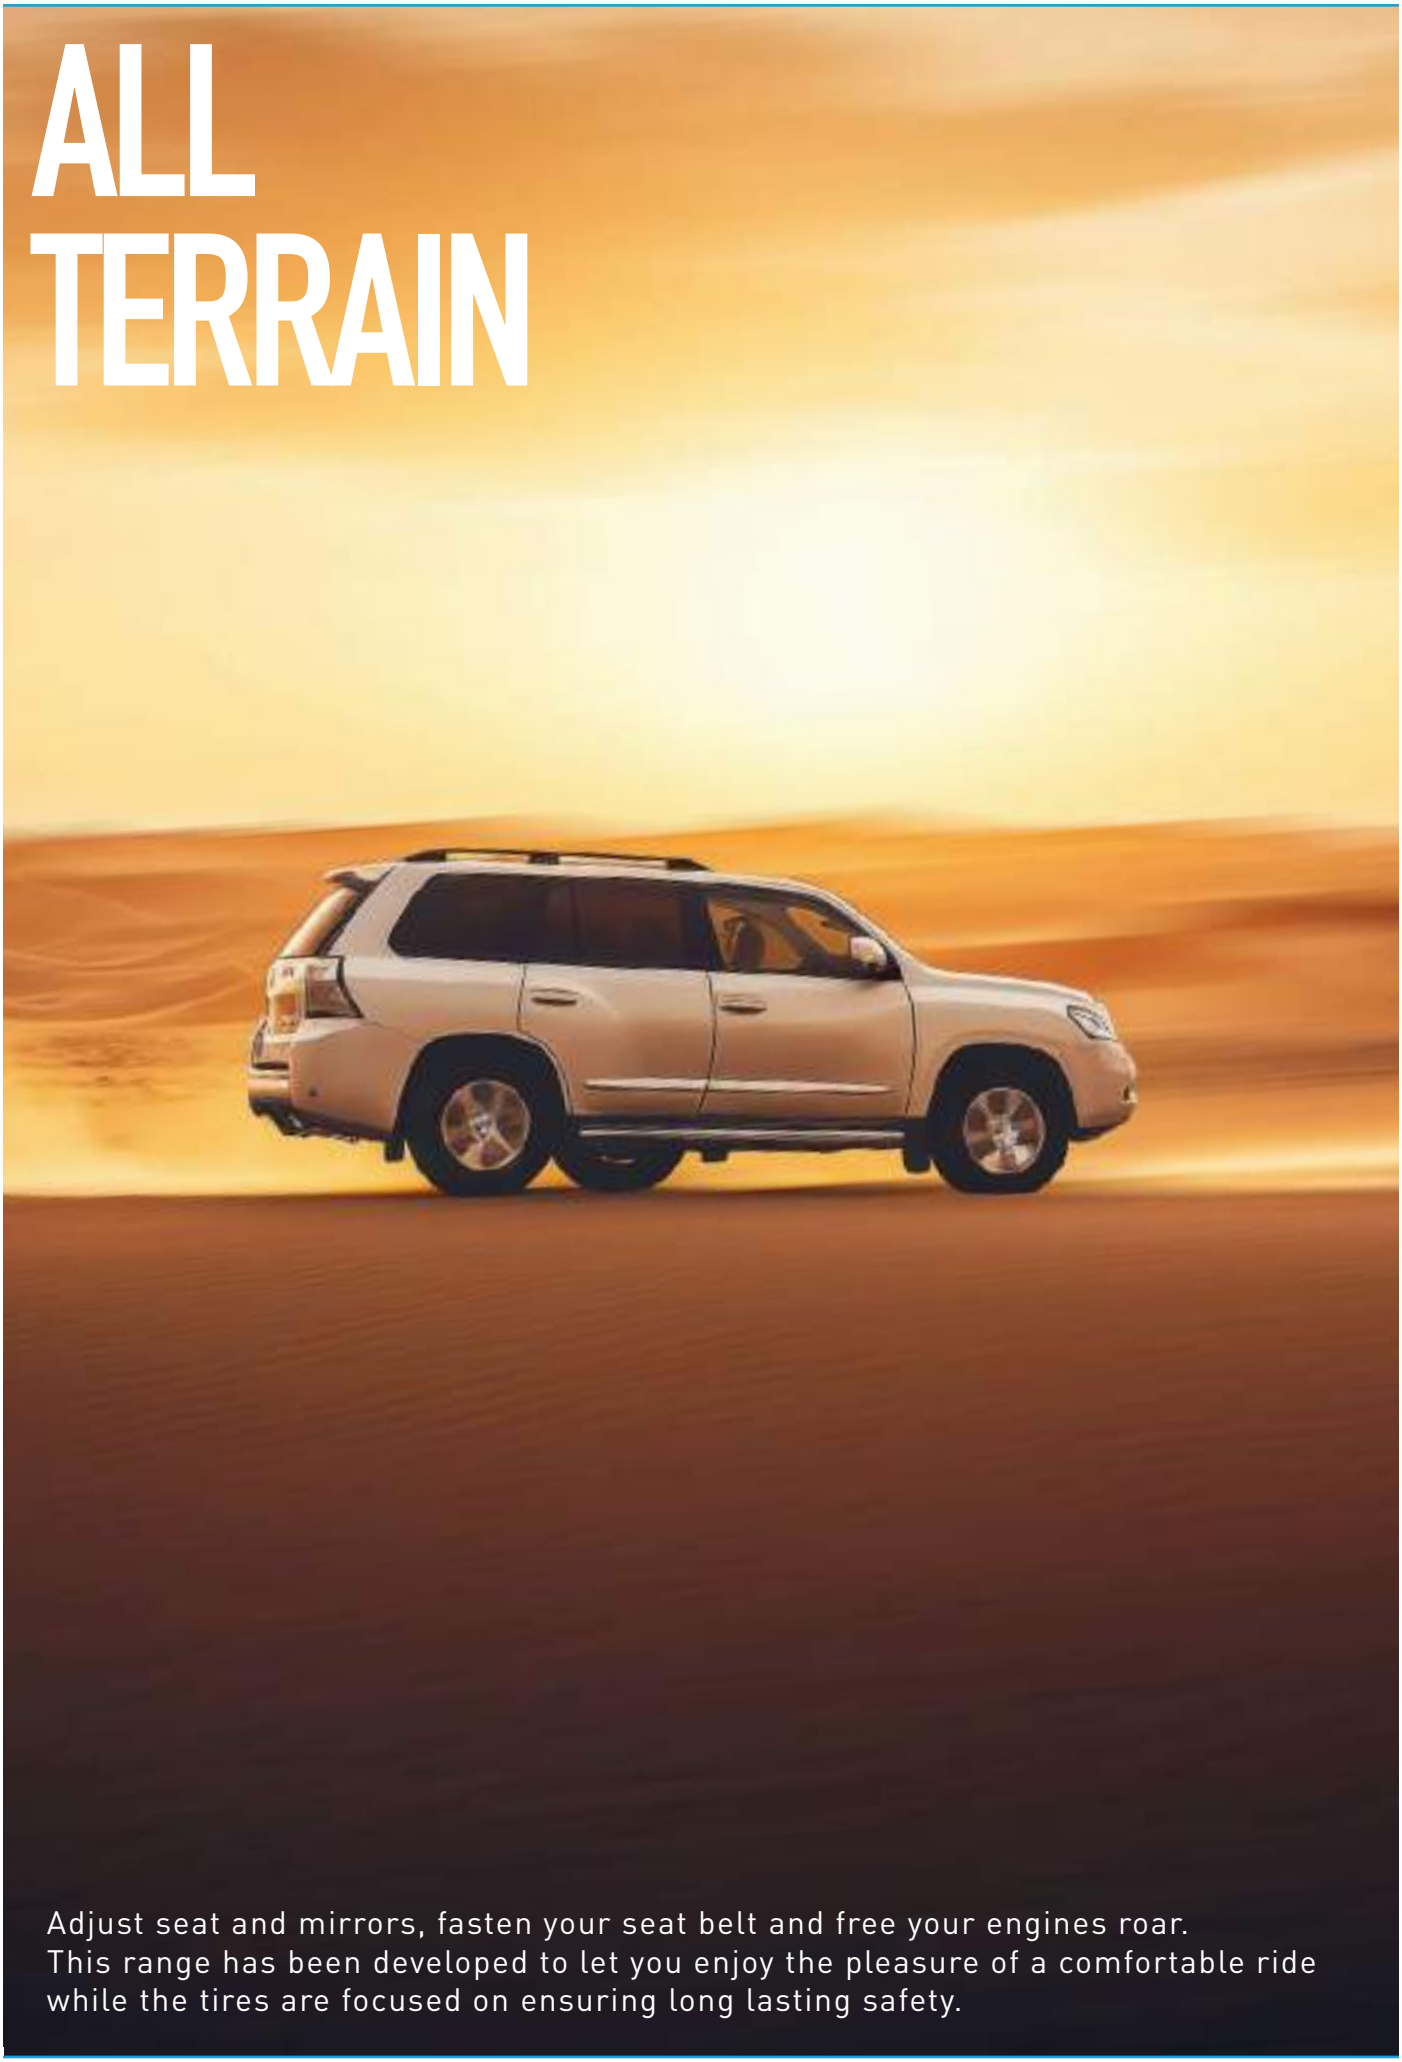

NON DIRECTIONAL

IA/KA-207

TOURING | RAIN & WET | DURABILITY | HANDLING

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
31x10.5 R15LT 6PR	109Q	8,5	778	281	10,5	1030	2270	3,4	50
32x11.5 R15LT 6PR	113Q	9,0	800	293	10,6	1150	2535	3,4	50
235/60R16	100T	7,0	688	235	9,8	800	1764	2,5	36
245/70 R16	111T XL	7,0	750	245	10,6	1090	2403	3,4	50
265/70 R16	116T XL	8,0	779	276	10,5	1250	2756	3,4	50
265/65 R17	116T XL	8,0	780	274	10,5	1250	2756	3,4	50
285/65 R17	120T XL	8,5	802	292	10,6	1400	3086	3,4	50
265/60 R18	114T XL	8,0	779	270	10,5	1180	2601	3,4	50
285/60 R18	120T XL	8,5	800	290	10,5	1400	3086	3,4	50
265/50 R20	112T XL	8,5	778	270	10,5	1120	2469	3,4	50
275/55R20	117T XL	8,5	813	277	10,6	1285	2833	3,4	50
275/45R20	110H XL	9,0	760	269	10,6	1060	2337	3,4	50
285/50 R20	116T XL	9,0	802	286	10,5	1250	2756	3,4	50

SW TYPE: RWL / RBL/ OSBL, For 20" available only OSBL

Terra Raider A/TX



NON DIRECTIONAL

KU-257

TOURING | OFF-ROAD | RAIN & WET | DURABILITY | 3PMSF

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
LT235/75R15	104/101Q	6	6,5	739	227	12,8	900	1985	825	1820	3,5	50
31x10.50R15LT	109Q	6	8,5	781	271	14,0	1030	2270	-	-	3,5	50
LT235/85R16	120/116Q	10	6,5	811	234	12,8	1380	3042	1260	2778	5,5	80
LT245/75R16	120/116Q	10	7,0	781	242	12,8	1380	3042	1260	2778	5,5	80
LT265/75R16	123/120Q	10	7,5	810	266	14,3	1550	3415	1400	3085	5,5	80
LT285/75R16	126/123Q	10	8,0	836	292	14,3	1700	3750	1550	3415	5,5	80
245/65R17	111T XL	-	7,0	754	246	10,6	1090	2403	-	-	3,4	50
LT235/80R17	120/117Q	10	6,5	812	231	12,8	1400	3085	1285	2835	5,5	80
LT245/75R17	121/118Q	10	7,0	803	249	14,3	1450	3195	1320	2910	5,5	80
LT265/70R17	121/118Q	10	8,0	807	268	14,3	1450	3195	1320	2910	5,5	80
LT285/70R17	123/120Q	10	8,5	838	290	14,3	1550	3415	1400	3085	5,5	80
33x12.50R17LT	120Q	10	10,0	830	325	14,3	1400	3085	-	-	4,5	65
35x12.50R17LT	121Q	10	10,0	880	324	14,3	1450	3195	-	-	4,5	65
37x12.50R17LT	124Q	10	10,0	934	338	14,3	1600	3525	-	-	4,5	65
265/60R18	114T XL	-	8,0	779	270	10,6	1180	2601	-	-	3,4	50
LT265/70R18	124/121Q	10	8,0	832	270	14,3	1600	3525	1450	3195	5,5	80
LT275/70R18	125/122Q	10	8,0	847	275	14,3	1650	3640	1500	3305	5,5	80
LT275/65R18	123/120Q	10	8,0	817	277	14,3	1550	3415	1400	3085	5,5	80
LT285/70R18	127/124Q	10	8,5	859	288	14,3	1750	3860	1600	3525	5,5	80
LT285/65R18	125/122Q	10	8,5	837	288	14,3	1650	3640	1500	3305	5,5	80
LT325/65R18	121/118Q	8	9,5	882	331	14,1	1450	3195	1320	2910	3,5	50
LT325/65R18	127/124Q	10	9,5	882	339	14,3	1750	3860	1600	3525	4,5	65
33x12.50R18LT	122Q	12	10,0	828	321	14,3	1500	3305	-	-	5,5	80
33x12.50R18LT	123Q	10	10,0	880	318	14,3	1550	3415	-	-	4,5	65
35X12.50R18LT	123Q	10	10,0	880	318	14,3	1550	3415	-	-	4,5	65
35X12.50R18LT	128Q	12	10,0	880	318	14,3	1800	3970	-	-	5,5	80
37X12.50R18LT	128Q	10	10,0	935	332	14,3	1800	3970	-	-	4,5	65
LT265/60R20	121/118Q	10	8,0	832	266	14,3	1450	3195	1320	2910	5,5	80
LT275/65R20	126/123Q	10	8,0	872	275	14,3	1700	3750	1550	3415	5,5	80
LT275/60R20	123/120Q	10	8,0	845	272	14,3	1550	3415	1400	3085	5,5	80
LT275/55R20	120/117Q	10	8,5	820	270	14,3	1400	3085	1285	2835	5,5	80
LT285/60R20	125/122Q	10	8,5	858	285	14,3	1650	3640	1500	3305	5,5	80
LT285/55R20	122/119Q	10	9,0	831	289	14,3	1500	3305	1360	3000	5,5	80
LT285/50R20	119/116Q	10	9,0	802	287	14,3	1360	3000	1250	2755	5,5	80
LT305/55R20	121/118Q	10	9,5	847	310	14,3	1450	3195	1320	2910	4,5	65
33x12.50R20LT	114Q	10	10,0	830	315	14,3	1180	2600	-	-	4,5	65
33x12.50R20LT	119Q	12	10,0	830	315	14,3	1360	3000	-	-	5,5	80
35X12.50R20LT	121Q	10	10,0	880	316	14,3	1450	3195	-	-	4,5	65
35X12.50R20LT	125Q	12	10,0	880	316	14,3	1650	3640	-	-	5,5	80
37X12.50R20LT	126Q	10	10,0	935	320	14,3	1700	3750	-	-	4,5	65
285/45R22	114T XL	-	9,5	821	285	10,6	1180	2601	-	-	3,4	50
35x12.50R22LT	117Q	10	10,0	882	315	14,3	1285	2835	-	-	4,5	65
35x12.50R22LT	121Q	12	10,0	882	315	14,3	1450	3195	-	-	5,5	80



Terra Roamer A/T

NON DIRECTIONAL

IA-201

TOURING | RAIN & WET | WEAR LIFE

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
235/70R15	103S	7,0	710	235	10,2	875	1930	2,5	36



Terra Roamer A/T Plus

NON DIRECTIONAL

IA-204

TOURING | RAIN & WET | WEAR LIFE

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
245/70R16	111T XL	7,0	750	250	10,8	1090	2403	2,9	42

SW TYPE: Outline White Letters / Outline Black Letters

Terra Cruiser



NON DIRECTIONAL

IA-205

TOURING | RAIN & WET | WEAR LIFE

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/70R14	88S	5,5	616	190	10,0	560	1235	2,5	36
195/70R14	91S	6,0	629	203	10,0	615	1356	2,5	36
195/65R15	91S	6,0	635	200	10,0	615	1356	2,5	36
195/65R15	95S XL	6,0	635	200	10,0	690	1521	2,9	42
205/70R15	96S	6,0	670	210	10,0	710	1565	2,5	36
205/70R15	100S XL	6,0	670	210	10,0	800	1764	2,9	42
235/75R15	105S	6,5	733	237	11,0	925	2040	2,5	36
235/75R15	109S XL	6,5	733	237	11,0	1030	2270	2,9	42

SW TYPE: Outline White Letters / Outline Black Letters